


<b>Type</b>	RecoveryHexHorizontal
<b>Unit Type:</b>	Indoor
<b>Project Tag</b>	13577177
<b>Size</b>	VVS020s
<b>Set</b>	VVS020s-R-FPVH/VVS020s-L-FPV_cd
<b>Insulation thickness</b>	40 mm
<b>Insulation</b>	Mineral Wool
<b>Weight of the set (+/- 10%)*</b>	332 Kg
<b>Supply airflow 2</b>	2200.00 m³/h
<b>External pressure</b>	300 Pa
<b>Exhaust airflow 2</b>	2200.00 m³/h
<b>External pressure</b>	300 Pa
<b>SFP Winter</b>	1.66 kW/m³/s
<b>SFP Summer</b>	1.70 kW/m³/s
<b>Ecodesign</b>	Yes (2018 +)
<b>Eurovent Energy efficiency class (Winter 2016 / Summer 2020)</b>	A+ 2016



Top View

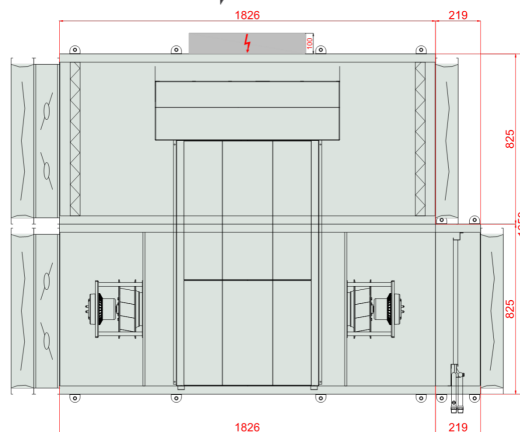


Comment 1:




Front View (left)

Front View (right)

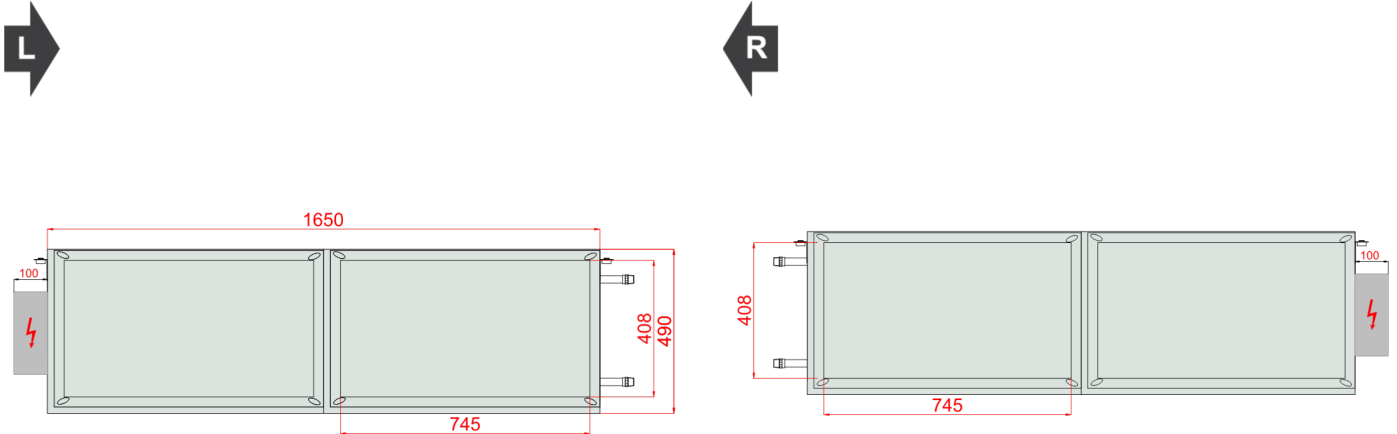

Inspection Panels

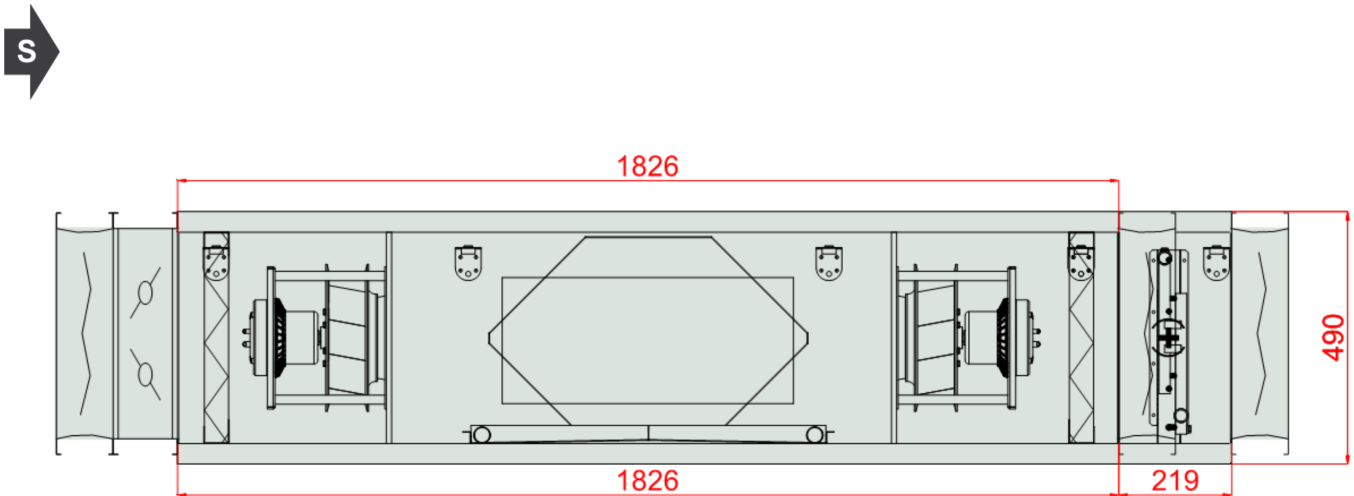

Sizes [mm]

Air intake Supply FF	745x408	Lt 2045	Hi 410	Wi 745
Air outlet Supply FF	745x408	LtA 2390	H 490	W 825
		L1 2045		W2 1650
Air inlet Exhaust FF	745x408	L2 1826		
Air outlet Exhaust FF	745x408	L22 219		

Unit design

Walls filled with MW 40mm, double skin made of steel, excluding silencer and electric heater sections

Down base unit inspection

Casing anti-corrosion protection: Aluzinc AZ 150.  
 Base unit with pre-configured EC motors drives  
 Energy recovery efficiency meet EC 1253/2014 requirements

### Temperature Conditions

	Reference atmospheric pressure 101325 Pa			Winter outdoor reference temperature -20.0 °C		
	External air			Return air		
	DBT	RH	DA	DBT	RH	DA
Summer	32.0 °C	45 %	1.2000 kg/m³	20.0 °C	65 %	1.2000 kg/m³
Winter	-20.0 °C	100 %	1.2000 kg/m³	20.0 °C	40 %	1.2000 kg/m³

### Supply

#### Panel Filter

Type F7/50.EU7MPleat.Int.Sld

ePM2,5 65% (ISO16890) - EFF CLASS E Flat Mini-Pleat Filter[27.0]

Filter Energy Performance Class E

#### Winter operation

50% Dirty Air Pressure Drop 121 Pa  
 Initial Air Pressure Drop 91 Pa  
 100% Dirty Air Pressure Drop 150 Pa  
 Air velocity 2.04 m/s

#### Summer operation

50% Dirty Air Pressure Drop 121 Pa  
 Initial Air Pressure Drop 91 Pa  
 100% Dirty Air Pressure Drop 150 Pa  
 Air velocity 2.04 m/s

#### Air Filter Sizes

P,FLT F7 742x410x48 (1-2-0301-0283) 1,000 x Pcs

## Counter-Flow Recuperator (Hexagonal)

### Type PCR VVS020s Hex

HIPS or AL 3.0 (SR)

#### Winter operation

##### Supply

Intake air DBT / RH	-20.0 °C / 100 %
Discharge air DBT / RH	11.8 °C / 7 %
Air velocity	2.15 m/s
Pressure drop Wet / Dry Wet	61 Pa
Air Pressure	101325 Pa
Air Density	1.2000 kg/m³
Air Volume Flow	2200.00 m³/h
Recovery capacity Sensible / Total Total	23.5 kW
Actual efficiency / at balanced flow Real / BalancedFlow	80 % / 80 %
Dry efficiency in winter	74 %

#### Winter operation

##### Exhaust

Intake air DBT / RH	20.0 °C / 40 %
Discharge air DBT / RH	-2.8 °C / 99 %
Air velocity	2.15 m/s
Pressure drop Wet / Dry Wet	81 Pa
Air Pressure	101325 Pa
Air Density	1.2000 kg/m³
Air Volume Flow	2200.00 m³/h
Recovery Bypass	Yes
Air Damper	No
Counter-Flow (Hex)	
Max Internal Leakage	0.25%

#### Summer operation

##### Supply

Intake air DBT / RH	32.0 °C / 45 %
Discharge air DBT / RH	23.2 °C / 75 %
Air velocity	2.15 m/s
Pressure drop Wet / Dry Wet	87 Pa
Air Pressure	101325 Pa
Air Density	1.2000 kg/m³
Air Volume Flow	2200.00 m³/h
Recovery capacity Sensible / Total Total	-6.5 kW
Actual efficiency / at balanced flow Real	73 %

#### Summer operation

##### Exhaust

Intake air DBT / RH	20.0 °C / 65 %
Discharge air DBT / RH	27.7 °C / 41 %
Air velocity	2.15 m/s
Pressure drop Wet / Dry Wet	81 Pa
Air Pressure	101325 Pa
Air Density	1.2000 kg/m³
Air Volume Flow	2200.00 m³/h
Eco Design Class	Eco Design

### Recovery Additional Info

PlateExchangers

### Plug-Fan Set

#### Fan Section PLUG\_DD\_250\_0,70\_1.58

EC\_IE4\_F\_IMB14\_71\_1.58p\_T 771.3.570 250|0.7kW|1.58x1

Qty in section x 1

Fan Set Designed for wet operating conditions

The fan system effects is taken into account in the fan performances.

#### Fan PLUG\_VS\_250\_AF\_Px 1



Total Static Pressure	501 Pa	Impeller efficiency: Static / Total	65 %/75 %
Dynamic pressure	71 Pa	Shaft power	0.47 kW x 1
External pressure	300 Pa	Working revolutions	3423 1/min
Total Pressure	572 Pa		
<b>Winter operation</b>		<b>Summer operation</b>	
Air Volume Flow	2200.00 m³/h	Air Volume Flow	2200.00 m³/h

**Motor EC\_IE4\_F\_71\_IMB14\_1.58p\_0.7\_50x 1**

771.3.570	EC	50Hz	
FLA	3.4 A	MCA	4.3 A
MCB	6.0 A		
		Rated revolutions	4000 1/min
Operational Voltage	230 V/1 ph	Rated Power	0.70 kW x 1
Name plate RPM	230 V/1 ph/50 Hz		

**EC Motor Controller**

	<u>_EC</u>	<u>_EC</u>	
Motor Drive FLA (Full-Load Amperes)	3.4 A	Motor Drive MCA (Min. Circuit Ampacity)	4.3 A
Motor Drive MCB (Max. Circuit Breaker)	6.0 A		
EC Controller Settings	43 Hz		

<b>Winter operation</b>		<b>Summer operation</b>	
EPC for mean contaminated filters	0.54 kW	EPC for mean contaminated filters	0.56 kW
EPC for clean filters	0.52 kW	EPC for clean filters	0.54 kW
SFP for clean filters	0.85 kW/m³/s	SFP for clean filters	0.88 kW/m³/s

**Fan Section Power Supply Additional Info**

C20/1

**Hot Water Coil**

<b>Type</b> WCL VVS020s 1R DT SH.St.St.Std	<b>Number of rows</b> 1	<b>Connection Supply/Return:</b> 3/4"/22	
Standard Circuits	0,97 [dm³]		
Medium	Water	Maximum working pressure	16 bar
Intake air DBT / RH	11.8 °C / 7 %	Discharge air DBT / RH	20.0 °C / 4 %
Air velocity	2.37 m/s	Pressure drop Wet / Dry Wet	19 Pa
Air Pressure	101325 Pa	Air Density	1.2000 kg/m³
Air Volume Flow	2200.00 m³/h		
Total heating capacity	6.0 kW	Medium temperature	70.0 °C/50.0 °C
Medium flow rate	0.26 m³/h	Medium pressure drop	3.47 kPa



### Acoustic data

Acoustic power level [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lw [dB(A)]
Inlet	[dB(A)]	53.6	59.8	57.6	52.5	49.1	52.6	49.7	63.6
Outlet	[dB(A)]	52.7	59.8	45.0	49.8	43.7	41.8	37.1	61.2
Environment	[dB(A)]	38.8	50.2	56.1	52.4	52.8	33.2	25.6	59.5

Acoustic pressure level at 1 meter distance [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lp [dB(A)]
	[dB(A)]	31.8	43.2	49.1	45.4	45.8	26.2	18.6	52.5

### Exhaust airflow 3

#### Panel Filter

##### Type M5/50.EU5MPleat.Int.Sld

ePM10 40% - ISO 16890 - EFF CLASS E Flat Mini-Pleat Filter[26.0]

Filter Energy Performance Class E

##### Winter operation

50% Dirty Air Pressure Drop 109 Pa  
 Initial Air Pressure Drop 68 Pa  
 100% Dirty Air Pressure Drop 150 Pa  
 Air velocity 2.04 m/s

##### Summer operation

50% Dirty Air Pressure Drop 109 Pa  
 Initial Air Pressure Drop 68 Pa  
 100% Dirty Air Pressure Drop 150 Pa  
 Air velocity 2.04 m/s

##### Air Filter Sizes

P,FLT M5 742x410x48 (1-2-0301-0279) 1,000 x Pcs

#### Plug-Fan Set

##### Fan Section PLUG\_DD\_250\_0,70\_1.58

EC\_IE4\_F\_IMB14\_71\_1.58p\_T 771.3.570 250|0.7kW|1.58x1

Qty in section x 1

Fan Set Designed for wet operating conditions

The fan system effects is taken into account in the fan performances.

##### Fan PLUG\_VS\_250\_AF\_Px 1

Total Static Pressure	491 Pa	Impeller efficiency: Static / Total	65 %/74 %
Dynamic pressure	71 Pa	Shaft power	0.46 kW x 1
External pressure	300 Pa	Working revolutions	3412 1/min
Total Pressure	561 Pa		
<b>Winter operation</b>		<b>Summer operation</b>	
Air Volume Flow	2200.00 m³/h	Air Volume Flow	2200.00 m³/h

##### Motor EC\_IE4\_F\_71\_IMB14\_1.58p\_0.7\_50x 1

771.3.570 EC 50Hz





FLA	3.4 A	MCA	4.3 A
MCB	6.0 A		
		Rated revolutions	4000 1/min
Operational Voltage	230 V/1 ph	Rated Power	0.70 kW x 1
Name plate RPM	230 V/1 ph/50 Hz		

**EC Motor Controller**

	_EC		_EC
Motor Drive FLA (Full-Load Amperes)	3.4 A	Motor Drive MCA (Min. Circuit Ampacity)	4.3 A
Motor Drive MCB (Max. Circuit Breaker)	6.0 A		
EC Controller Settings	43 Hz		

**Winter operation**

EPC for mean contaminated filters	0.53 kW
EPC for clean filters	0.50 kW
SFP for clean filters	0.82 kW/m³/s

**Summer operation**

EPC for mean contaminated filters	0.53 kW
EPC for clean filters	0.50 kW
SFP for clean filters	0.82 kW/m³/s

**Fan Section Power Supply Additional Info**

C20/1

**Acoustic data**

Acoustic power level [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lw [dB(A)]
Inlet	[dB(A)]	49.1	62.4	68.4	68.7	67.0	61.6	56.0	73.6
Outlet	[dB(A)]	51.8	65.1	71.1	71.4	69.7	65.2	59.6	76.4
Environment	[dB(A)]	38.8	50.1	56.1	52.4	52.7	33.2	25.6	59.4

Acoustic pressure level at 1 meter distance [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lp [dB(A)]
	[dB(A)]	31.8	43.1	49.1	45.4	45.7	26.2	18.6	52.4

**AHU Discharge and Intake Opening Sizes & Unit Accessories**

**Supply**

**Exhaust**

Controls Selection Mode: Functional set

AHU Discharge and Intake Opening Sizes	Supply	Exhaust
Air Inlet	Front 745x408	Front 745x408
Air Outlet	Front 745x408	Front 745x408
AirDamper	Supply	Exhaust
Air Inlet	Provided 715x380	Not Provided
Air Outlet	Not Provided	Provided 715x380
Flexible Connection	Supply	Exhaust
Air Inlet	Provided 715x380	Provided 715x380
Air Outlet	Provided 715x380	Provided 715x380

**Control application**



**Functional Code** AP110000063000001  
**APP Code** uPC3 (AP-161)  
**Main Temp. Sensor** Duct Exhaust

Human Machine Interface		Options	
BMS	Yes	Differential Pressure Transducer	CAV
HMI Advanced (Settings)	Yes		
HMI Basic (User)	Yes		
Control Box	Yes		

Air damper actuators			
Name	Code		Set
Air Damper Actuator ON-OFF S 10Nm	ADMP.ACT.SET ON-OFF S 10Nm		1
Air Damper Actuator ON-OFF 10Nm	ADMP.ACT.SET ON-OFF 10Nm		1
Air Damper Actuator 0-10 2Nm	ADMP.ACT.SET 0-10 2Nm		1

Temperature sensor			
Name	Code		Set
Strap-on temperature sensor NTC 10k	Temp. Sensor NTC10k (Strap-on)		1
Duct temperature sensor NTC 10k	Temp. Sensor NTC10k (Duct)		1
Resp_Controls_TempSensors_Temp. Sensor NTC10k (Outdoor)	Temp. Sensor NTC10k (Outdoor)		3

Hydronic Coils Controls			
Name	Code		Set
3-way Valve	VLV.SET-3W-2,5		1

Transducers and Switches			
Name	Code		Set
Frost Switch	FRST.SWITCH		1
Differential Pressure Transducer CAV	PRSS.TRDC_CAV		1

**DECLARATION OF PERFORMANCE - Product information - (EU) 1253/2014 annex V as referred to in art. 4(2)**

No.	Parameter	Unit	Value
1	Manufacturer's name		VTS sp. z o.o.
2	Manufacturer's product code		VVS020s-F-P-V-H
3	Declared type		NRVU, BVU
4	Type of drive installed		VFD(AC) or Controller(EC)
5	Type of energy recovery		Other
6	Thermal efficiency of heat recovery	%	74.00
7	Nominal NRVU flow rate		0.61 / 0.61
8	Effective electric power input	kW	0.54 / 0.53
9	Internal Specific Fan Power (SFPint)	w/m³/s	268.93 / 265.74
10	Face velocity	m/s	2.11
11	Nominal external pressure	Pa	300.00 / 300.00
12	Internal Pressure Drop of ventilation components $\Delta p_{s,int}$	Pa	151.93 / 149.43
13	Internal pressure drop of non-ventilation components $\Delta p_{s,add}$	Pa	49.01 / 41.37
14	Maximum Leakage Rate	%	0.01 / 0.01
15	Energy performance of filters (declared information about the calculated annual energy consumption)		EU7MPleat / F7 / - / EU5MPleat / M5 / -
16	Description of visual filter warning for NRVUs		Supported by control application
17	Casing sound power level LWA	dBA	59





18	Internet address for disassembly instructions		<a href="http://www.vtsgroup.com">http://www.vtsgroup.com</a>
19	Ecodesign Compliance		Yes (2018 +)

**Section splits**

Transport Sections	Mass [Kg]	LENGTH [mm]	WIDTH [mm]	HEIGHT [mm]
1	299	1826	1650	490
2	27	219	825	490

Transport Sections Dims

