


<b>Type</b>	RecoveryRotaryVerticalCompact
<b>Unit Type:</b>	Indoor
<b>Project Tag</b>	13577232
<b>Size</b>	VVS055c
<b>Set</b>	VVS055c-R-FRVHC/VVS055c-L-FVR_cd
<b>Insulation thickness</b>	40 mm
<b>Insulation</b>	Mineral Wool
<b>Weight of the set (+/- 10%)*</b>	551 Kg
<b>Supply airflow 2</b>	7150.00 m³/h
<b>External pressure</b>	300 Pa
<b>Exhaust airflow 2</b>	7150.00 m³/h
<b>External pressure</b>	300 Pa
<b>SFP Winter</b>	2.44 kW/m³/s
<b>SFP Summer</b>	2.50 kW/m³/s
<b>Ecodesign</b>	Yes (2018 +)
<b>Eurovent Energy efficiency class (Winter 2016 / Summer 2020)</b>	B 2016




**Inspection Panels**

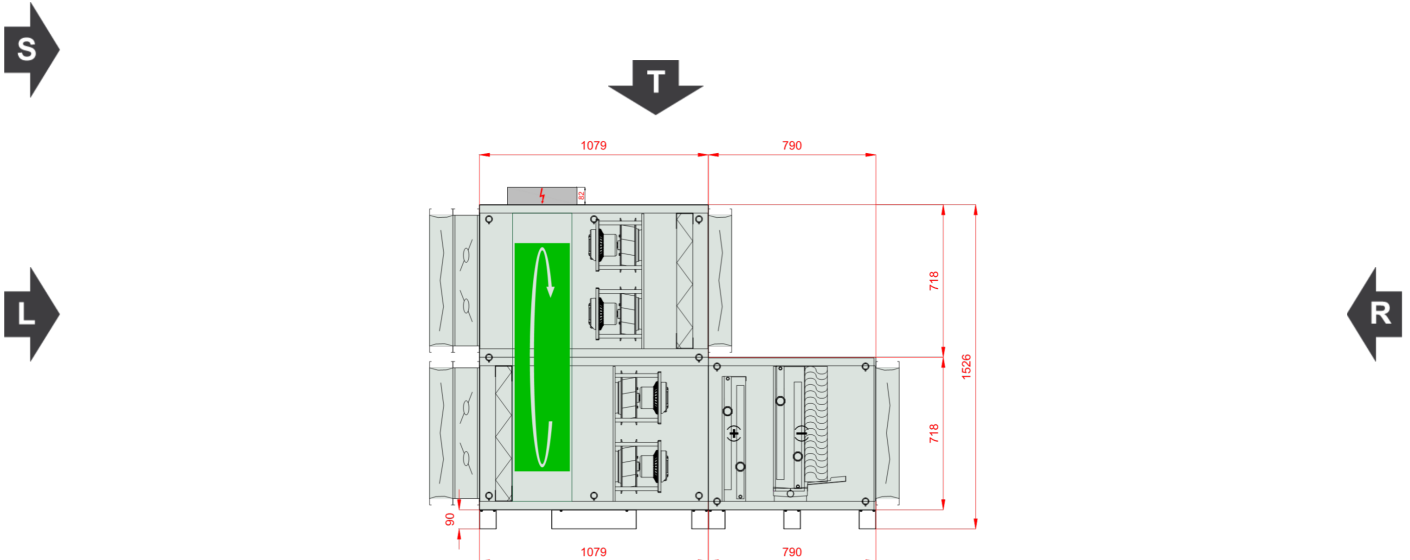


Comment 1:




Front View (left)

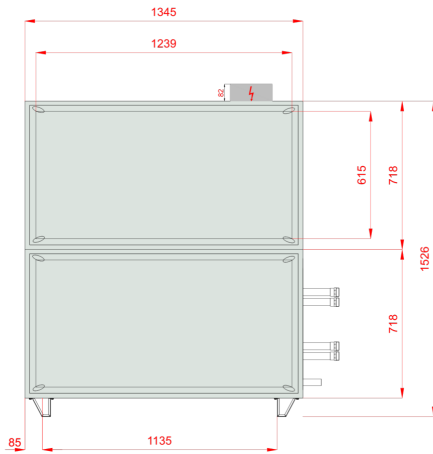


Front View (right)

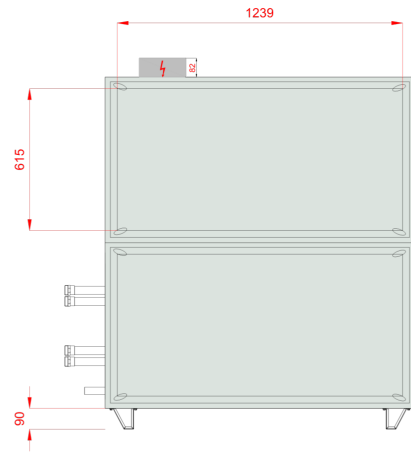

Top View

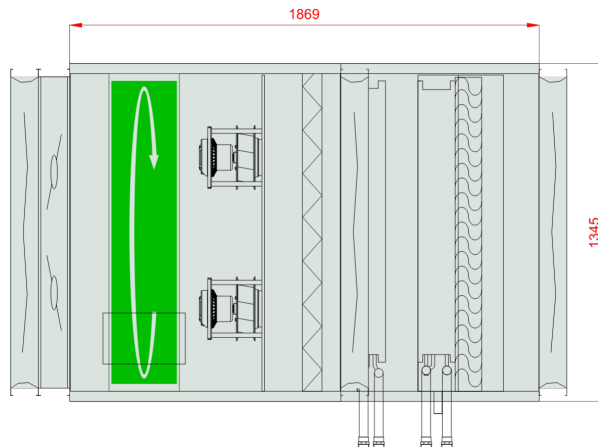

**Frame Top View, within the AHU outline contour**

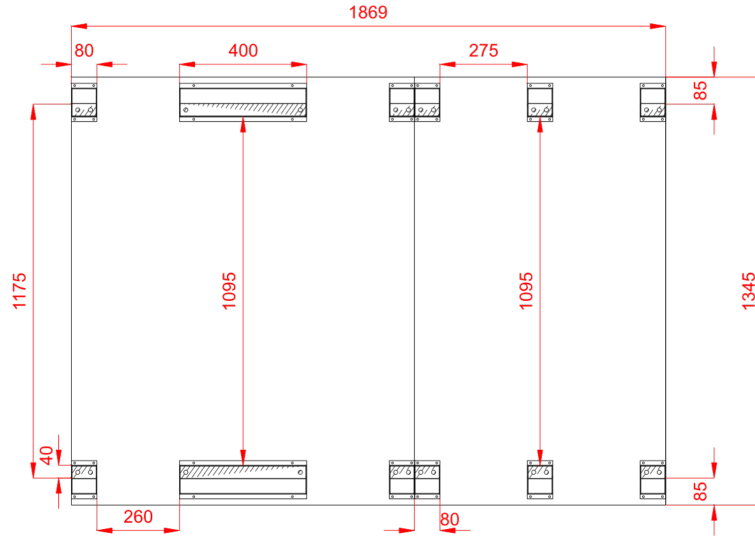

**Sizes [mm]**

<b>Air intake Supply</b> FF	1239x615	<b>Lt</b> 1869	<b>Hi</b> 638	<b>Wi</b> 1265
<b>Air outlet Supply</b> FF	1239x615	<b>LtA</b> 2214	<b>H</b> 808	<b>W</b> 1345
		<b>L1</b> 1869	<b>H2</b> 1526	
<b>Air inlet Exhaust</b> FF	1239x615	<b>L2</b> 1079	<b>Hf</b> 90	
<b>Air outlet Exhaust</b> FF	1239x615	<b>L22</b> 790		

**Unit design**

40mm insulated walls , double skin made of steel

Unit Power Supply 400V/3ph/50Hz

Casing anti-corrosion protection: Aluzinc AZ 150. Corrosion resistance (salt spary test): over 2400 hours

In case of delivery with controls a base unit fully wired, with pre-configured controller and EC motors drives

Energy recovery efficiency exceeding 86% (for EC 1253/2014 conditions)

**Temperature Conditions**

Reference atmospheric pressure 101325 Pa

Winter outdoor reference temperature -20.0 °C

	External air			Return air		
	DBT	RH	DA	DBT	RH	DA
Summer	32.0 °C	45 %	1.2000 kg/m³	20.0 °C	65 %	1.2000 kg/m³
Winter	-20.0 °C	100 %	1.2000 kg/m³	20.0 °C	40 %	1.2000 kg/m³



**Supply**

**Panel Filter**

**Type F7/50.EU7MPleat.Int.Sld**

ePM2,5 65% (ISO16890) - EFF CLASS E Flat Mini-Pleat Filter[27.0]

Filter Energy Performance Class E

**Winter operation**

50% Dirty Air Pressure Drop 138 Pa  
 Initial Air Pressure Drop 126 Pa  
 100% Dirty Air Pressure Drop 150 Pa  
 Air velocity 2.48 m/s

**Summer operation**

50% Dirty Air Pressure Drop 138 Pa  
 Initial Air Pressure Drop 126 Pa  
 100% Dirty Air Pressure Drop 150 Pa  
 Air velocity 2.48 m/s

**Air Filter Sizes**

P.FLT (1-2-0301-0216) 6,000 x Pcs



## Rotary Wheel

### Type RRG VVS055c NHG

R2\_SR\_NHG

Rated voltage 230 V/1 ph/50 Hz

#### Winter operation

##### Supply

Intake air DBT / RH -20.0 °C / 100 %

Discharge air DBT / RH 9.8 °C / 51 %

Air velocity 3.63 m/s

Pressure drop Wet / Dry Wet / Dry 195 Pa / 228 Pa

Air Pressure 101325 Pa

Air Density 1.2000 kg/m<sup>3</sup>

Air Volume Flow 7150.00 m<sup>3</sup>/h

Recovery capacity Sensible / Total  
Sensible / Total 71.5 kW / 90.9 kW

Actual efficiency / at balanced flow Real /  
BalancedFlow 75 % / 75 %

Dry efficiency in winter 75 %

#### Winter operation

##### Exhaust

Intake air DBT / RH 20.0 °C / 40 %

Discharge air DBT / RH -7.9 °C / 95 %

Air velocity 3.63 m/s

Pressure drop Wet / Dry Wet / Dry 227 Pa / 228 Pa

Air Pressure 101325 Pa

Air Density 1.2000 kg/m<sup>3</sup>

Air Volume Flow 7150.00 m<sup>3</sup>/h

Recovery Bypass No

Rotary Regenerator

Max Internal Leakage 3%

#### Summer operation

##### Supply

Intake air DBT / RH 32.0 °C / 45 %

Discharge air DBT / RH 22.9 °C / 77 %

Air velocity 3.63 m/s

Pressure drop Wet / Dry Wet / Dry 236 Pa / 228 Pa

Air Pressure 101325 Pa

Air Density 1.2000 kg/m<sup>3</sup>

Air Volume Flow 7150.00 m<sup>3</sup>/h

Recovery capacity Sensible / Total  
Sensible / Total 21.8 kW / 21.8 kW

Actual efficiency / at balanced flow Real 76 %

#### Summer operation

##### Exhaust

Intake air DBT / RH 20.0 °C / 65 %

Discharge air DBT / RH 29.1 °C / 38 %

Air velocity 3.63 m/s

Pressure drop Wet / Dry Wet / Dry 227 Pa / 228 Pa

Air Pressure 101325 Pa

Air Density 1.2000 kg/m<sup>3</sup>

Air Volume Flow 7150.00 m<sup>3</sup>/h

Eco Design Class

Eco Design

### Recovery Additional Info

RotaryExchangers

## Plug-Fan Set

### Fan Section PLUG\_DD\_225\_0,74\_1.33

EC\_IE4\_F\_IMB14\_71\_1.33p\_T

771.3.570-2

225|0.74kW|1.33x4

Qty in section

x 4

Fan Set Designed for wet operating conditions

The fan system effects is taken into account in the fan performances.

### Fan PLUG\_VS\_225\_AF\_Px 4





Total Static Pressure	838 Pa	Impeller efficiency: Static / Total	70 %/76 %
Dynamic pressure	74 Pa	Shaft power	0.59 kW x 4
External pressure	300 Pa	Working revolutions	4367 1/min
Total Pressure	912 Pa		
<b>Winter operation</b>		<b>Summer operation</b>	
Air Volume Flow	7150.00 m³/h	Air Volume Flow	7150.00 m³/h

**Motor EC\_IE4\_F\_71\_IMB14\_1.33p\_0.74\_50x 4**

771.3.570-2	EC	50Hz	
		Rated revolutions	4500 1/min
Operational Voltage	230 V/1 ph	Rated Power	0.74 kW x 4
Name plate RPM	230 V/1 ph/50 Hz		

**EC Motor Controller**

EC Controller Settings	49 Hz
------------------------	-------

<b>Winter operation</b>		<b>Summer operation</b>	
EPC for mean contaminated filters	2.75 kW	EPC for mean contaminated filters	2.88 kW
EPC for clean filters	2.72 kW	EPC for clean filters	2.84 kW
SFP for clean filters	1.37 kW/m³/s	SFP for clean filters	1.43 kW/m³/s

**Fan Section Power Supply Additional Info**

C32/3

**Hot Water Coil**

<b>Type</b> WCL VVS055c 2R DT SH.St.St.Std	<b>Number of rows</b> 2	<b>Connection Supply/Return:</b> 1 1/4"/1 1/4"
--	-------------------------	--

Standard Circuits	4,71 [dm³]		
Medium	Water	Maximum working pressure	16 bar
Intake air DBT / RH	9.8 °C / 51 %	Discharge air DBT / RH	20.0 °C / 26 %
Air velocity	3.02 m/s	Pressure drop Wet / Dry Wet	69 Pa
Air Pressure	101325 Pa	Air Density	1.2000 kg/m³
Air Volume Flow	7150.00 m³/h		
Total heating capacity	24.5 kW	Medium temperature	70.0 °C/50.0 °C
Medium flow rate	1.06 m³/h	Medium pressure drop	1.08 kPa



### Chilled Water Coil with Droplet Eliminator

**Type** WCL VVS055c 3R DT SH.St.St.Std **Number of rows** 3 **Connection Supply/Return:** 1 1/4"/1 1/4"

Standard Circuits	7,52 [dm <sup>3</sup> ]		
Medium	Water	Maximum working pressure	16 bar
Intake air DBT / RH	22.9 °C / 77 %	Discharge air DBT / RH	20.0 °C / 84 %
Air velocity	3.05 m/s	Pressure drop Wet / Dry Wet / Dry	134 Pa / 72 Pa
Air Pressure	101325 Pa	Air Density	1.2000 kg/m <sup>3</sup>
Air Volume Flow	7150.00 m <sup>3</sup> /h		
Cooling capacity: Sensible / Total	7.1 kW/13.4 kW	Medium temperature: Inlet / Outlet	7.0 °C/12.0 °C
Medium flow rate	2.30 m <sup>3</sup> /h	Medium pressure drop	6.12 kPa

### Acoustic data

Acoustic power level [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lw [dB(A)]
Inlet	[dB(A)]	54.8	67.2	72.3	71.7	68.2	61.9	55.4	76.6
Outlet	[dB(A)]	56.6	63.6	48.0	51.9	41.2	29.5	23.0	64.7
Environment	[dB(A)]	44.3	55.6	53.6	47.9	40.2	32.7	19.1	58.4

Acoustic pressure level at 1 meter distance [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lp [dB(A)]
	[dB(A)]	37.3	48.6	46.6	40.9	33.2	25.7	12.1	51.4

### Exhaust airflow 3

#### Panel Filter

**Type** M5/50.EU5MPleat.Int.Sld

ePM10 40% - ISO 16890 - EFF CLASS E Flat Mini-Pleat Filter[26.0]

Filter Energy Performance Class E

#### Winter operation

50% Dirty Air Pressure Drop	123 Pa
Initial Air Pressure Drop	95 Pa
100% Dirty Air Pressure Drop	150 Pa
Air velocity	2.48 m/s

#### Summer operation

50% Dirty Air Pressure Drop	123 Pa
Initial Air Pressure Drop	95 Pa
100% Dirty Air Pressure Drop	150 Pa
Air velocity	2.48 m/s

#### Air Filter Sizes

P.FLT (1-2-0301-0204) 6,000 x Pcs

#### Plug-Fan Set

**Fan Section** PLUG\_DD\_225\_0,74\_1.33

EC\_IE4\_F\_IMB14\_71\_1.33p\_T 771.3.570-2 225|0.74kW|1.33x4

Qty in section x 4

Fan Set Designed for wet operating conditions

The fan system effects is taken into account in the fan performances.



#### Fan PLUG\_VS\_225\_AF\_Px 4

Total Static Pressure	650 Pa	Impeller efficiency: Static / Total	68 %/75 %
Dynamic pressure	74 Pa	Shaft power	0.48 kW x 4
External pressure	300 Pa	Working revolutions	4139 1/min
Total Pressure	724 Pa		
<b>Winter operation</b>		<b>Summer operation</b>	
Air Volume Flow	7150.00 m³/h	Air Volume Flow	7150.00 m³/h

#### Motor EC\_IE4\_F\_71\_IMB14\_1.33p\_0.74\_50x 4

771.3.570-2	EC	50Hz	
		Rated revolutions	4500 1/min
Operational Voltage	230 V/1 ph	Rated Power	0.74 kW x 4
Name plate RPM	230 V/1 ph/50 Hz		

#### EC Motor Controller

EC Controller Settings	46 Hz
------------------------	-------

#### Winter operation

EPC for mean contaminated filters	2.20 kW
EPC for clean filters	2.13 kW
SFP for clean filters	1.07 kW/m³/s

#### Summer operation

EPC for mean contaminated filters	2.20 kW
EPC for clean filters	2.13 kW
SFP for clean filters	1.07 kW/m³/s

#### Fan Section Power Supply Additional Info

C32/3

#### Acoustic data

Acoustic power level [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lw [dB(A)]
Inlet	[dB(A)]	55.4	68.8	74.7	75.0	73.4	67.9	62.3	80.0
Outlet	[dB(A)]	58.1	71.5	77.4	77.7	76.1	71.5	65.9	82.7
Environment	[dB(A)]	43.1	54.5	52.4	46.7	39.1	31.5	17.9	57.3

Acoustic pressure level at 1 meter distance [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lp [dB(A)]
	[dB(A)]	36.1	47.5	45.4	39.7	32.1	24.5	10.9	50.3

#### AHU Discharge and intake Opening Sizes & Unit Accessories

#### Supply

#### Exhaust

Controls Selection Mode: Functional set

AHU Discharge and Intake Opening Sizes	Supply	Exhaust
Air Inlet	Front 1239x615	Front 1239x615
Air Outlet	Front 1239x615	Front 1239x615
AirDamper	Supply	Exhaust
Air Inlet	Provided	Not Provided





Air Outlet	Not Provided	Provided
<b>Flexible Connection</b>	Supply	Exhaust
Air Inlet	Provided	Provided
Air Outlet	Provided	Provided

### Control application

<b>Functional Code</b>	AR 1 1 0 0 0 0 0 6 3 0 0 0 0 1		
<b>APP Code</b>	uPC3 (AR-133)		
<b>Main Temp. Sensor</b>	Duct Exhaust		
<b>Human Machine Interface</b>	<b>Options</b>		
BMS	Yes	Differential Pressure Transducer	CAV
HMI Advanced (Settings)	Yes		
HMI Basic (User)	Yes		
Control Box	Yes		
<b>Air damper actuators</b>			
Name	Code	Set	
Air Damper Actuator ON-OFF S 10Nm	ADMP.ACT.SET ON-OFF S 10Nm	1	
Air Damper Actuator ON-OFF 10Nm	ADMP.ACT.SET ON-OFF 10Nm	1	
<b>Temperature sensor</b>			
Name	Code	Set	
Resp_Controls_TempSensors_Temp. Sensor NTC10k (Outdoor)	Temp. Sensor NTC10k (Outdoor)	3	
Duct temperature sensor NTC 10k	Temp. Sensor NTC10k (Duct)	1	
Strap-on temperature sensor NTC 10k	Temp. Sensor NTC10k (Strap-on)	1	
<b>Hydronic Coils Controls</b>			
Name	Code	Set	
3-way Valve	VLV.SET-3W-10	2	
<b>Transducers and Switches</b>			
Name	Code	Set	
Frost Switch	FRST.SWITCH	1	
Differential Pressure Transducer CAV	PRSS.TRDC_CAV	1	

### AHU Connection Box

<b>AHU Connection Box</b>			
Rated Power	5.92 kW	Full Load Amps	26.0 A
Power Connection	3x400V AC +N+PE	Power Cord	5 x 6,00 mm <sup>2</sup>

### DECLARATION OF PERFORMANCE - Product information - (EU) 1253/2014 annex V as referred to in art. 4(2)

No.	Parameter	Unit	Value
1	Manufacturer's name		VTS sp. z o.o.
2	Manufacturer's product code		VVS055c-F-R-V-H-C
3	Declared type		NRVU, BVU
4	Type of drive installed		VFD(AC) or Controller(EC)
5	Type of energy recovery		Other
6	Thermal efficiency of heat recovery	%	76.00



7	Nominal NRVU flow rate		1.99 / 1.99
8	Effective electric power input	kW	2.75 / 2.20
9	Internal Specific Fan Power (SFPint)	w/m³/s	531.67 / 549.06
10	Face velocity	m/s	2.48
11	Nominal external pressure	Pa	300.00 / 300.00
12	Internal Pressure Drop of ventilation components $\Delta ps, int$	Pa	321.48 / 321.83
13	Internal pressure drop of non-ventilation components $\Delta ps, add$	Pa	216.14 / 28.50
14	Maximum Leakage Rate	%	0.01 / 0.01
15	Energy performance of filters (declared information about the calculated annual energy consumption)		EU7MPleat / F7 / - / EU5MPleat / M5 / -
16	Description of visual filter warning for NRVUs		Supported by control application
17	Casing sound power level LWA	dBA	58
18	Internet address for disassembly instructions		<a href="http://www.vtsgroup.com">http://www.vtsgroup.com</a>
19	Ecodesign Compliance		Yes (2018 +)

### Section splits

Transport Sections	Mass [Kg]	LENGTH [mm]	WIDTH [mm]	HEIGHT [mm]
1	399	1079	1345	1526
2	123	790	1345	808

Transport Sections Dims

