



Type	RecoveryRotaryWithHeatPumpVertical
Unit Type:	Indoor
Project Tag	13577238
Size	VVS030c
Set	VVS030c-R-HFXVH/VVS030c-L-FXV_cd
Insulation thickness	40 mm
Insulation	Mineral Wool
Weight of the set (+/- 10%)*	558 Kg
Supply airflow 2	3000.00 m³/h
External pressure	300 Pa
Exhaust airflow 2	3000.00 m³/h
External pressure	300 Pa
SFP Winter	2.45 kW/m³/s
SFP Summer	2.46 kW/m³/s
Ecodesign	Yes (2018 +)
Eurovent Energy efficiency class (Winter 2016 / Summer 2020)	E 2016

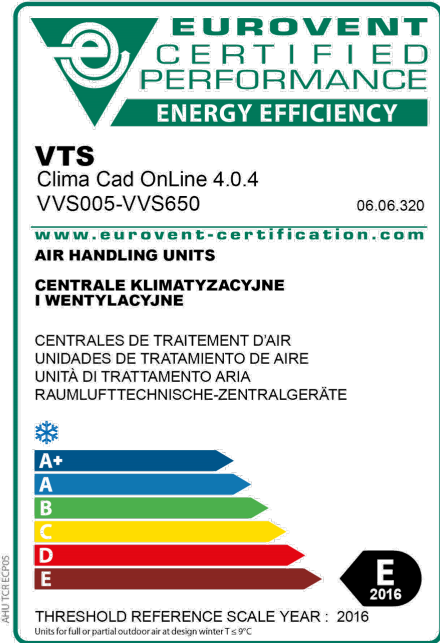


Inspection Panels

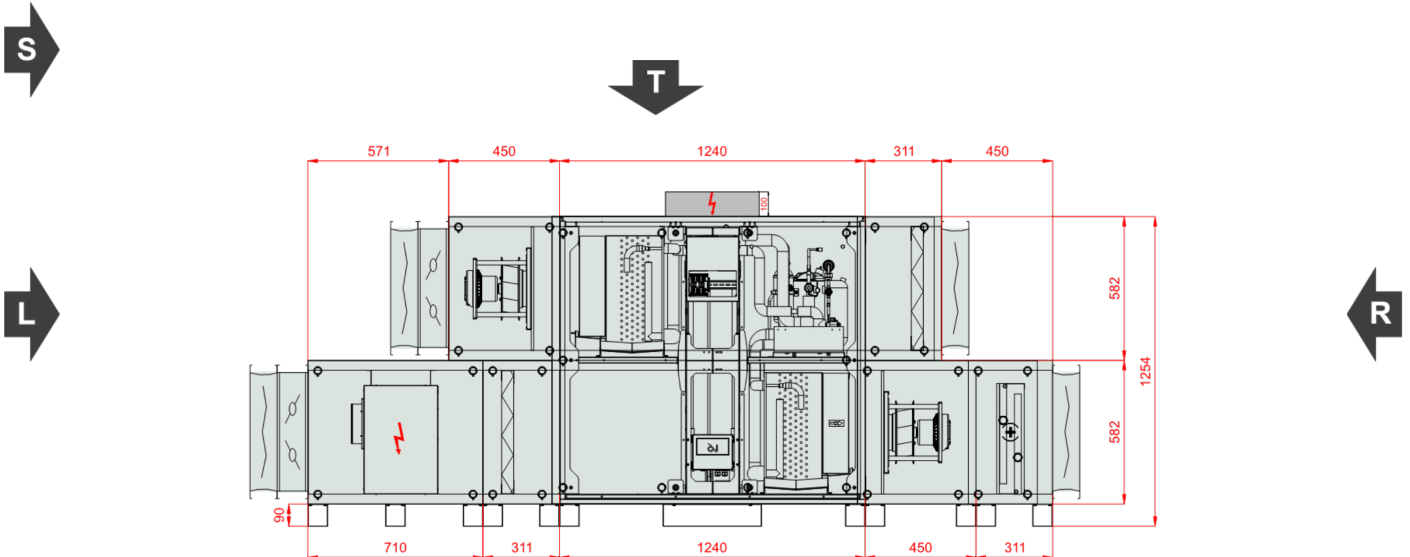


Comment 1:




Front View (left)

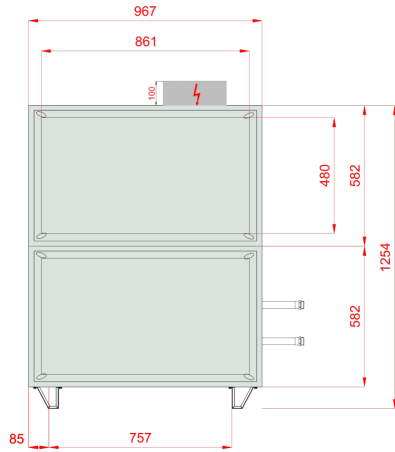


Front View (right)

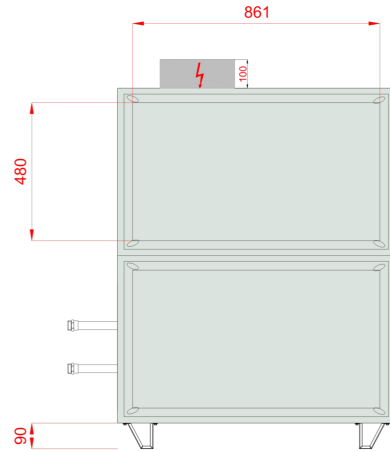

Top View

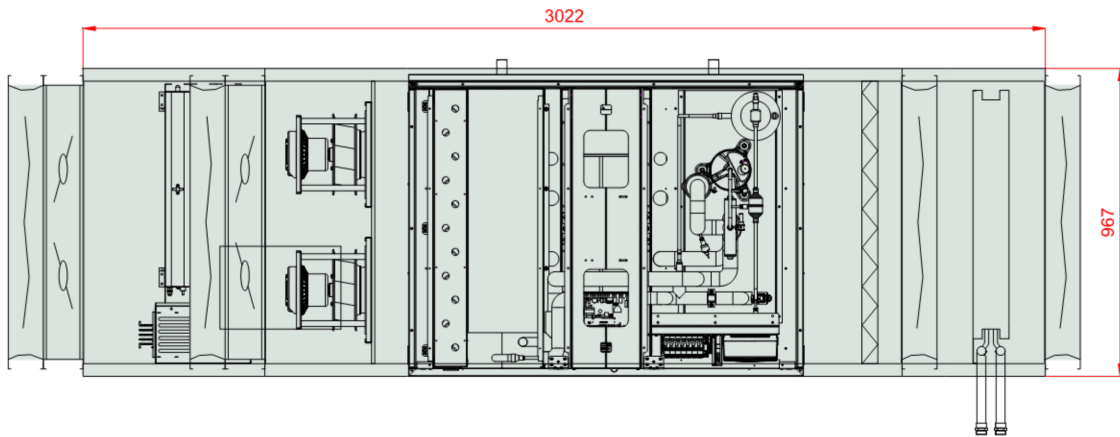

Frame Top View, within the AHU outline contour

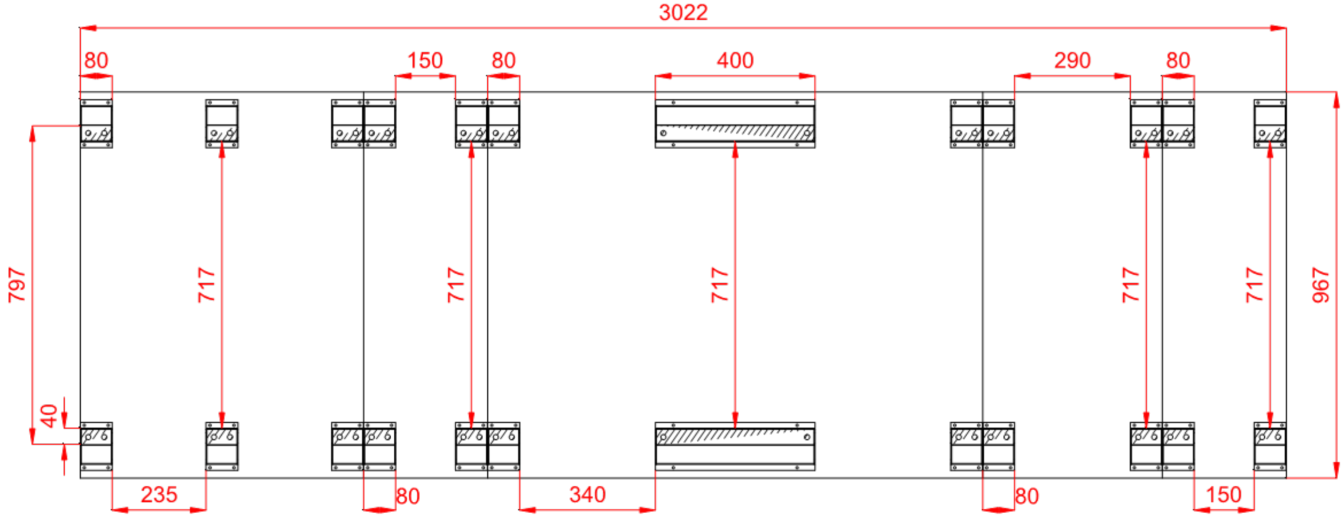

Sizes [mm]

Air intake Supply FF	861x480	Lt 3022	Hi 502	Wi 887
Air outlet Supply FF	861x480	LtA 3367	H 672	W 967
		L1 3022	H2 1254	
Air inlet Exhaust FF	861x480	L2 2001	Hf 90	
Air outlet Exhaust FF	861x480	L21 571		
		L22 450		

Unit design

40mm insulated walls , double skin made of steel
 Unit Power Supply 400V/3ph/50Hz
 Casing anti-corrosion protection: Aluzinc AZ 150. Corrosion resistance (salt spary test): over 2400 hours
 In case of delivery with controls a base unit fully wired, with pre-configured controller and EC motors drives
 Energy recovery efficiency exceeding 86% (for EC 1253/2014 conditions)

Temperature Conditions

	Reference atmospheric pressure 101325 Pa			Winter outdoor reference temperature -20.0 °C		
	External air			Return air		
	DBT	RH	DA	DBT	RH	DA
Summer	28.0 °C	45 %	1.2000 kg/m³	25.0 °C	50 %	1.2000 kg/m³
Winter	-20.0 °C	90 %	1.2000 kg/m³	20.0 °C	20 %	1.2000 kg/m³



Supply

+ Electric heater in casing

Type VVS030c-2,00kW-400/3/50-RES **Version** N6_400_3_50_FullControls_RES_YES

Rated Electric Power	12.00 kW		
Intake air DBT / RH	-20.0 °C / 90 %	Discharge air DBT / RH	-9.0 °C / 33 %
Air velocity	4.39 m/s	Pressure drop Wet / Dry Wet	77 Pa
Air Volume Flow	3000.00 m³/h		
Heating capacity	11.1 kW		

↔ Panel Filter

Type F7/50.EU7MPleat.Int.Sld

ePM2,5 65% (ISO16890) - EFF CLASS E Flat Mini-Pleat Filter[27.0]

Filter Energy Performance Class E

Winter operation

50% Dirty Air Pressure Drop	112 Pa
Initial Air Pressure Drop	74 Pa
100% Dirty Air Pressure Drop	150 Pa
Air velocity	1.89 m/s

Summer operation

50% Dirty Air Pressure Drop	112 Pa
Initial Air Pressure Drop	74 Pa
100% Dirty Air Pressure Drop	150 Pa
Air velocity	1.89 m/s

Air Filter Sizes

P.FLT (1-2-0301-0214) 2,000 x Pcs



Heat Pump & RRG

Heat Wheel Data

Type RRG VVS030c HGR

R2_SR_HGR

Rated voltage 230 V/1 ph/50 Hz

Winter operation

Supply

Intake air DBT / RH -9.0 °C / 33 %
 Discharge air DBT / RH 13.3 °C / 23 %
 Pressure drop Wet / Dry Wet / Dry 203 Pa / 226 Pa
 Recovery capacity Sensible / Total 22.4 kW / 26.4 kW
 Sensible / Total
 Actual efficiency / at balanced flow Real / 77 % / 77 %
 BalancedFlow
 Dry efficiency in winter 77 %

Winter operation

Exhaust

Intake air DBT / RH 20.0 °C / 20 %
 Discharge air DBT / RH -1.8 °C / 60 %
 Pressure drop Wet / Dry Wet / Dry 226 Pa / 226 Pa
 Max Internal Leakage 3%

Summer operation

Supply

Intake air DBT / RH 28.0 °C / 45 %
 Discharge air DBT / RH 25.8 °C / 51 %
 Pressure drop Wet / Dry Wet / Dry 231 Pa / 226 Pa
 Recovery capacity Sensible / Total 2.2 kW / 2.5 kW
 Sensible / Total
 Actual efficiency / at balanced flow Real 74 %
 Resp_Recovery_LatentEfficiency_Name 14 %

Summer operation

Exhaust

Intake air DBT / RH 25.0 °C / 50 %
 Discharge air DBT / RH 27.3 °C / 45 %
 Pressure drop Wet / Dry Wet / Dry 229 Pa / 226 Pa

Heat Pump Data

HEAT PUMP VVS030c R2SR|H|6

R410A 5 Kg

Compressor Rated Power 5.00 kW
 Compressor Power Supply 230 V/3 ph/50 Hz

Winter operation

Compressor Power Consumption 2.34 kW
 Compressor Revolutions 120 1/s

Supply

Intake air DBT / RH 13.3 °C / 23 %
 Discharge air DBT / RH 24.6 °C / 11 %
 Pressure drop Wet / Dry Wet 104 Pa
 Capacity 11.7 kW
 COP - Coefficient of Performance 5

Exhaust

Pressure drop Wet / Dry Wet 118 Pa

Summer operation

Compressor Power Consumption 1.35 kW
 Compressor Revolutions 53 1/s

Supply

Intake air DBT / RH 25.8 °C / 51 %
 Discharge air DBT / RH 17.4 °C / 85 %
 Pressure drop Wet / Dry Wet 100 Pa
 Capacity 8.4 kW
 EER - Energy Efficiency Ratio 6

Exhaust

Pressure drop Wet / Dry Wet 99 Pa

▶ Plug-Fan Set

Fan Section PLUG_DD_225_0,74_1.33

EC_IE4_F_IMB14_71_1.33p_T 771.3.570-2 225|0.74kW|1.33x2

Qty in section x 2

Fan Set Designed for wet operating conditions

The fan system effects is taken into account in the fan performances.

Fan PLUG_VS_225_AF_Px 2

Total Static Pressure	844 Pa	Impeller efficiency: Static / Total	71 %/76 %
Dynamic pressure	52 Pa	Shaft power	0.49 kW x 2
External pressure	300 Pa	Working revolutions	4027 1/min
Total Pressure	896 Pa		

Winter operation

Air Volume Flow 3000.00 m³/h

Summer operation

Air Volume Flow 3000.00 m³/h

Motor EC_IE4_F_71_IMB14_1.33p_0.74_50x 2

771.3.570-2 EC 50Hz

Rated revolutions 4500 1/min

Operational Voltage 230 V/1 ph Rated Power 0.74 kW x 2

Name plate RPM 230 V/1 ph/50 Hz

EC Motor Controller

EC Controller Settings 45 Hz

Winter operation

EPC for mean contaminated filters 1.14 kW

EPC for clean filters 1.09 kW

SFP for clean filters 1.31 kW/m³/s

Summer operation

EPC for mean contaminated filters 1.17 kW

EPC for clean filters 1.12 kW

SFP for clean filters 1.35 kW/m³/s

Fan Section Power Supply Additional Info

C40/3

⊕ Hot Water Coil

Type WCL VVS030c 2R DT SH.St.St.Std Number of rows 2 Connection Supply/Return: 1"/1"

Standard Circuits 2,93 [dm³]

Medium	Water	Maximum working pressure	16 bar
Intake air DBT / RH	13.3 °C / 23 %	Discharge air DBT / RH	24.0 °C / 12 %
Air velocity	2.43 m/s	Pressure drop Wet / Dry Wet	47 Pa
Air Pressure	101325 Pa	Air Density	1.2000 kg/m³
Air Volume Flow	3000.00 m³/h		
Total heating capacity	10.8 kW	Medium temperature	70.0 °C/50.0 °C
Medium flow rate	0.47 m³/h	Medium pressure drop	0.96 kPa



Acoustic data

Acoustic power level [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lw [dB(A)]
Inlet	[dB(A)]	51.6	65.0	70.9	70.3	68.7	61.4	55.8	75.5
Outlet	[dB(A)]	56.1	63.2	48.4	53.2	47.1	45.2	40.5	64.6
Environment	[dB(A)]	40.2	51.6	49.5	43.8	36.2	28.6	15.0	54.4

Acoustic pressure level at 1 meter distance [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lp [dB(A)]
	[dB(A)]	33.2	44.6	42.5	36.8	29.2	21.6	8.0	47.4

Exhaust airflow 3

Panel Filter

Type M5/50.EU5MPleat.Int.Sld

ePM10 40% - ISO 16890 - EFF CLASS E Flat Mini-Pleat Filter[26.0]

Filter Energy Performance Class E

Winter operation

50% Dirty Air Pressure Drop 103 Pa
 Initial Air Pressure Drop 55 Pa
 100% Dirty Air Pressure Drop 150 Pa
 Air velocity 1.89 m/s

Summer operation

50% Dirty Air Pressure Drop 103 Pa
 Initial Air Pressure Drop 55 Pa
 100% Dirty Air Pressure Drop 150 Pa
 Air velocity 1.89 m/s

Air Filter Sizes

P.FLT (1-2-0301-0202) 2,000 x Pcs

Plug-Fan Set

Fan Section PLUG_DD_225_0,74_1.33

EC_IE4_F_IMB14_71_1.33p_T 771.3.570-2 225|0.74kW|1.33x2

Qty in section x 2

Fan Set Designed for wet operating conditions

The fan system effects is taken into account in the fan performances.

Fan PLUG_VS_225_AF_Px 2

Total Static Pressure	746 Pa	Impeller efficiency: Static / Total	71 %/76 %
Dynamic pressure	52 Pa	Shaft power	0.44 kW x 2
External pressure	300 Pa	Working revolutions	3889 1/min
Total Pressure	798 Pa		
Winter operation		Summer operation	
Air Volume Flow	3000.00 m³/h	Air Volume Flow	3000.00 m³/h

Motor EC_IE4_F_71_IMB14_1.33p_0.74_50x 2

771.3.570-2 EC 50Hz





Operational Voltage	230 V/1 ph	Rated revolutions	4500 1/min
Name plate RPM	230 V/1 ph/50 Hz	Rated Power	0.74 kW x 2

EC Motor Controller

EC Controller Settings	43 Hz
------------------------	-------

Winter operation

EPC for mean contaminated filters	1.01 kW
EPC for clean filters	0.95 kW
SFP for clean filters	1.14 kW/m³/s

Summer operation

EPC for mean contaminated filters	0.99 kW
EPC for clean filters	0.93 kW
SFP for clean filters	1.12 kW/m³/s

Fan Section Power Supply Additional Info

C40/3

Acoustic data

Acoustic power level [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lw [dB(A)]
Inlet	[dB(A)]	51.7	65.1	71.0	71.3	69.7	64.2	58.6	76.3
Outlet	[dB(A)]	54.4	67.8	73.7	74.0	72.4	67.8	62.2	79.0
Environment	[dB(A)]	39.4	50.8	48.7	43.0	35.4	27.8	14.2	53.6

Acoustic pressure level at 1 meter distance [dB(A)]	Frequency	125 [Hz]	250 [Hz]	500 [Hz]	1000 [Hz]	2000 [Hz]	4000 [Hz]	8000 [Hz]	Lp [dB(A)]
	[dB(A)]	32.4	43.8	41.7	36.0	28.4	20.8	7.2	46.6

AHU Discharge and Intake Opening Sizes & Unit Accessories

Supply

Exhaust

Controls Selection Mode: Functional set

AHU Discharge and Intake Opening Sizes	Supply	Exhaust
Air Inlet	Front 861x480	Front 861x480
Air Outlet	Front 861x480	Front 861x480
Air Damper	Supply	Exhaust
Air Inlet	Provided	Not Provided
Air Outlet	Not Provided	Provided
Flexible Connection	Supply	Exhaust
Air Inlet	Provided	Provided
Air Outlet	Provided	Provided

Control application

Functional Code	AX 0 0 2 3 1 0 0 6 3 0 0 0 0 0 1
APP Code	uPC3
Main Temp. Sensor	Duct Exhaust

Human Machine Interface	Options
HMI Advanced (Settings)	Differential Pressure Transducer CAV
	Yes



HMI Basic (User) Yes
 Control Box Yes

Air damper actuators

Name	Code	Set
Air Damper Actuator ON-OFF S 10Nm	ADMP.ACT.SET ON-OFF S 10Nm	1
Air Damper Actuator ON-OFF 10Nm	ADMP.ACT.SET ON-OFF 10Nm	1

Temperature sensor

Name	Code	Set
Resp_Controls_TempSensors_Temp. Sensor NTC10k (Outdoor)	Temp. Sensor NTC10k (Outdoor)	2
Duct temperature sensor NTC 10k	Temp. Sensor NTC10k (Duct)	2
Strap-on temperature sensor NTC 10k	Temp. Sensor NTC10k (Strap-on)	1

Hydronic Coils Controls

Name	Code	Set
3-way Valve	VLV.SET-3W-4	1

Transducers and Switches

Name	Code	Set
Frost Switch	FRST.SWICH	1
Differential Pressure Transducer CAV	PRSS.TRDC_CAV	1

AHU Connection Box

AHU Connection Box

Rated Power	2.96 kW	Full Load Amps	37.0 A
Power Connection	3x400V AC +N+PE	Power Cord	5 x 10,00 mm ²

TDS_AHUPowerConnection_ElectricHeaters

1 LP

TDS_AHUPowerConnection_Heaters

Rated Power	12.00 kW
Power Connection	400V+PE
Full Load Amps	17.3 A
TDS_AHUPowerConnection_MCA	21.6 A
TDS_AHUPowerConnection_CircuitBreaker	25.0 A
Power Cord	4 x 2,50 mm ²

TDS_AHUPowerConnection_Controls

Rated Power	12.00 kW
Power Connection	230V+N+PE
Full Load Amps	0.2 A
Power Cord	3 x 0,75 mm ²

DECLARATION OF PERFORMANCE - Product information - (EU) 1253/2014 annex V as referred to in art. 4(2)

No.	Parameter	Unit	Value
1	Manufacturer's name		VTS sp. z o.o.
2	Manufacturer's product code		VVS030c-H-F-X-V-H
3	Declared type		NRVU, UVU
4	Type of drive installed		VFD(AC) or Controller(EC)
5	Type of energy recovery		None
6	Thermal efficiency of heat recovery		Not applicable
7	Nominal NRVU flow rate		0.83
8	Effective electric power input	kW	1.14



9	Internal Specific Fan Power (SFPint)	w/m ³ /s	119.42
10	Face velocity	m/s	1.89
11	Nominal external pressure	Pa	300.00
12	Internal Pressure Drop of ventilation components Δps,int	Pa	73.61
13	Internal pressure drop of non-ventilation components Δps,add	Pa	469.97
14	Maximum Leakage Rate	%	0.01
15	Energy performance of filters (declared information about the calculated annual energy consumption)		EU7MPleat / F7 / -
16	Description of visual filter warning for NRVUs		Supported by control application
17	Casing sound power level LWA	dBA	54
18	Internet address for disassembly instructions		http://www.vtsgroup.com
19	Ecodesign Compliance		Yes (2018 +)

Section splits

Transport Sections	Mass [Kg]	LENGTH [mm]	WIDTH [mm]	HEIGHT [mm]
1	67	450	967	582
2	66	710	967	672
3	23	311	967	672
4	249	1240	967	1254
5	55	450	967	672
6	38	311	967	672
7	25	311	967	582

Transport Sections Dims

